


## SOLYX® Glass Finishes SXB-Colored Sand Blast Films

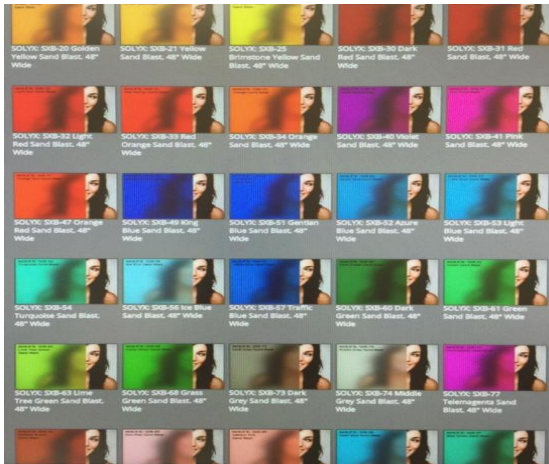

### Product Details

#### Manufacturer Detail

**SOLYX® SXB-Sand Blast Colored Films** are a translucent, high grade embossed vinyl combination that simulates sand blasted glass. Ideal for obscuring direct visibility while allowing excellent light transmission. Perfect for privacy, decorative or architectural applications. The total nominal thickness is 6 mil. Manufactured with a Plottable liner, which protects the clear, pressure-sensitive adhesive, and applied using the same tools and techniques for window films. (Plotting needs to be tested as this is a laminated product)

#### Brings Untempered Glass to Tempered Glass Safety Standards

PASSES:

ANSI Z97.1-1984

16 CFR 1201 U.S.G.S. Category II: Break Strength 100PLI

### Installation and Warranty

#### Installation

Installation should be in accordance with manufacturer's installation instructions.

#### Warranty

This SOLYX® product will be free from defects in material and manufacture for a period of five (5) years from the date of installation. See warranty information for specific details

### Product Distribution and Contact Information

#### Distribution

SOLYX® Decorative Films are available through qualified Installing Dealers, Distributors or from Decorative Films, LLC.

Samples submitted upon request.

#### Contact Information

Decorative Films, LLC 1-888-657-5224

[www.decorativefilm.com](http://www.decorativefilm.com)

### Product Description

**SOLYX® SXB-Sand Blast Colored Films** are a translucent, high grade embossed vinyl combination that simulates sand blasted glass. Ideal for obscuring direct visibility while allowing excellent light transmission.

#### Specifications

Product Code	SXB – Colored Sand Blast
Product Family	Graphic Colored Films
Film Type	Vinyl/Vinyl
Adhesive Type	Pressure-sensitive
Usage	Interior or Exterior
Available Width(s)	48"
Length	150 linear feet
Thickness	6 mil
Visible Light Transmission	Average - 72%
UV Transmission	1%
Infra-Red Transmission	Average – 62%%
Solar Absorption	Average – 35%

### Product Construction

#### Face Film:

6 mil PVC/PVC combination

**Adhesive:** Clear, Pressure-sensitive

**Release Liner:** Plottable